Wood Locating Diagram — 13' 3" Sourpuss Hull

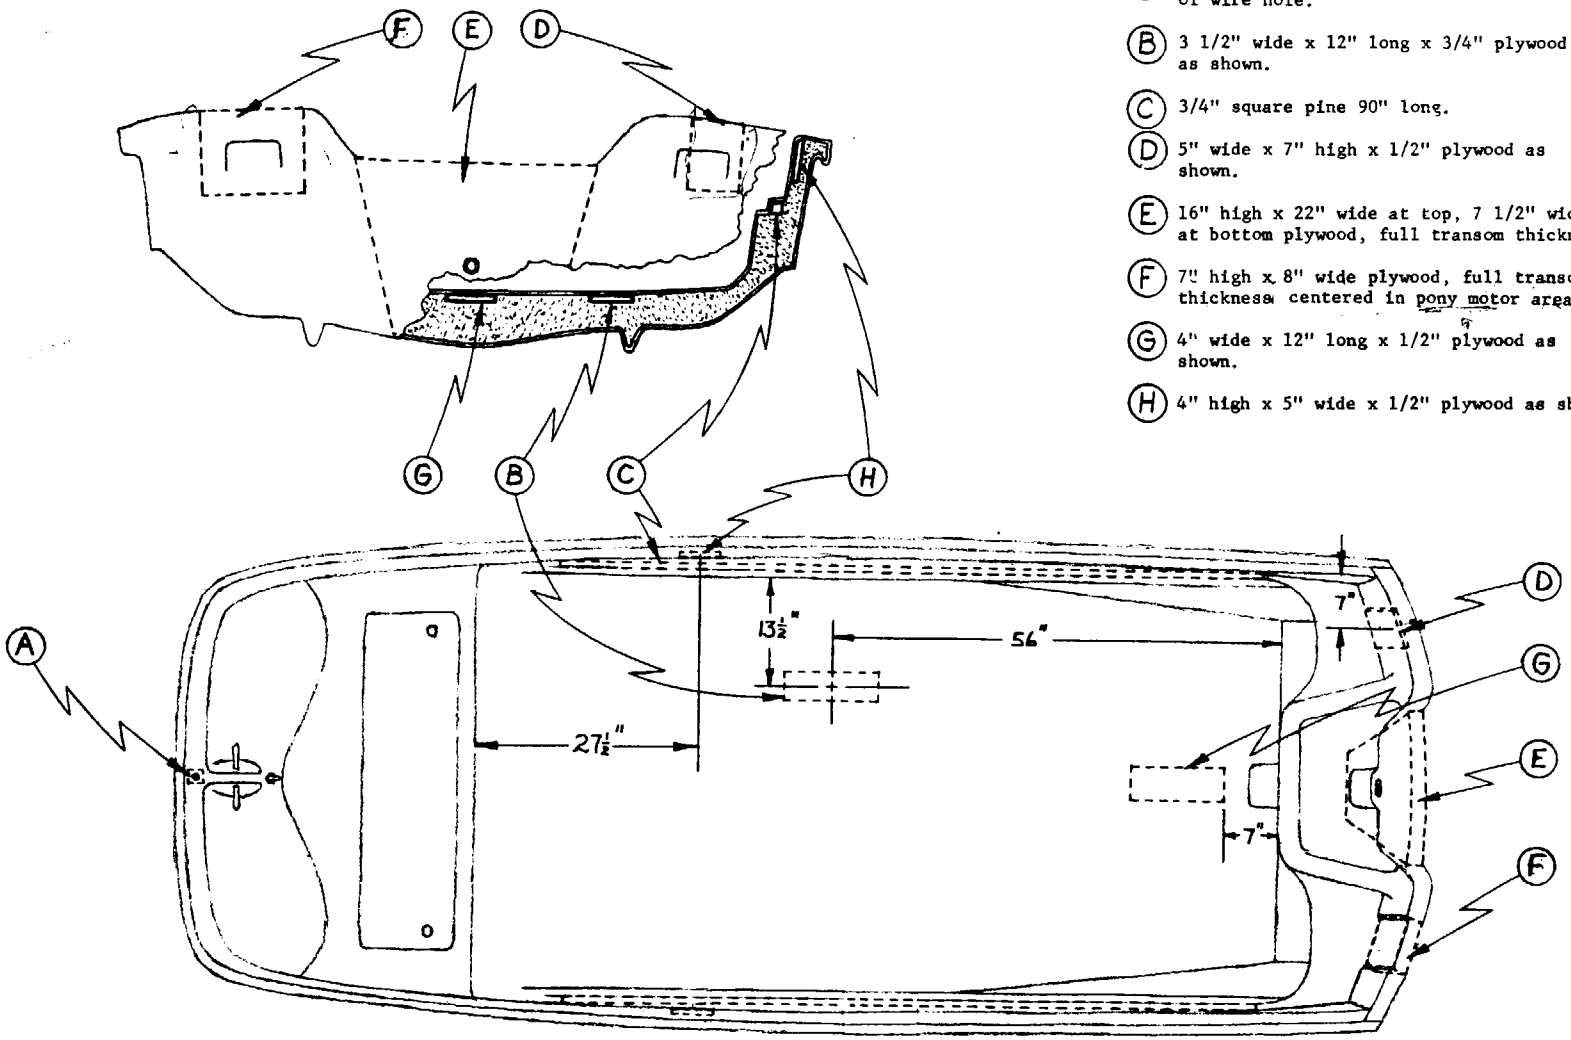

KEY

(A) 2" x 2" x 1/4" plywood on centerline of wire hole.

(B) 3 1/2" wide x 12" long x 3/4" plywood as shown.

(C) 3/4" square pine 90" long.

(D) 5" wide x 7" high x 1/2" plywood as shown.

(E) 16" high x 22" wide at top, 7 1/2" wide at bottom plywood, full transom thickness.

(F) 7" high x 8" wide plywood, full transom thickness centered in pony motor area.

(G) 4" wide x 12" long x 1/2" plywood as shown.

(H) 4" high x 5" wide x 1/2" plywood as shown.

DWG NO. 15-133

ENGINEERING DEPARTMENT

FISHER-PIERCE COMPANY, INC.

1149 Hingham St., Rockland, Mass.

SCALE	DATE	DRAWN	CH'K'D	APP'D
—	4/5/71	JVY		

REVISION

CODE	DESCRIPTION	DATE	BY	APP'D
(A)	Correction: (E) under Key was called at (D) in key, and was wrong.	4/12/71		
(B)	Correction: (G) under Key called "centerboard in pony motor area" changed to (F).			